


The Hill Center Galleries Installation Instructions

To preserve the original plaster walls of our historic building, the **Hill Center Galleries** uses the cable-based Arakawa hanging system which requires that all accepted submissions have D-Ring hanging hardware installed to the back of the work.

Please see the diagrams and hanging instructions below and follow directions carefully.

IMPORTANT: If you do not have the hardware installed properly, we will not be able to accept your work for installation in the exhibition.

Arakawa Hanging System:

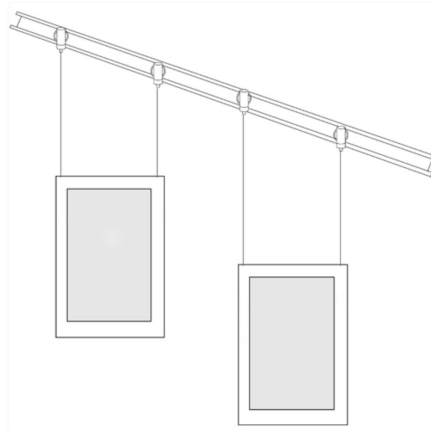

Proper D-Ring Installation:

D-Rings should be installed on the back of the artwork in the upper right and left corners, with the top of the ring pointing upward, leaving 2 inches of space from the top of the ring to the top edge of the artwork (see images below).

We have found that this is the ideal hardware installation to allow for most work to hang flush with the wall.

If D-Rings are not installed properly, then your work may hang at a non-optimal angle for viewing and will not be installed in the exhibition.

You do not need to have a wire installed for the Arakawa hanging system, but it is a good idea to provide a wire for use by a prospective purchaser.

D-Ring Hardware:



D-Ring
pointing
upward

Proper Installation Diagram:



D-Ring
pointing
upward
2" from
top of
artwork